



DUNBAR – 3625WS

3:1 HIGH SHRINK RATIO, DUAL-WALL, SEMI-RIGID, POLYOLEFIN TUBING

Applications

DUNBAR-3625WS is a semi-rigid, high shrink ratio, flame retardant heat shrinkable polyolefin tube with an adhesive lining which flows when heated. It is suitable for a wide range of applications such as encapsulation of cables, splices and components.

Features

- ★ Shrink ratio: 67% or more in the radial direction, 10% or less in the axial direction
- ★ In stock for immediate shipments
- ★ Continuous operating temperature: - 55°C (-67°F) to 110°C (230°F)
- ★ Flammability: UL VW-1 (Jacket only)
- ★ Excellent electrical properties
- ★ High resistance to abrasion, chemicals and oils

Standard

- ★ AMS-DTL-23053/4 Class 1 (Formerly MIL-DTL-23053/4 Class 1)
- ★ UL 224 (File Number: E319314)
- ★ RoHS Compliant

Specification Values

Property		Test Method	Value
Physical	Unaged	Tensile strength	Min. 1500 psi
		Elongation	Min. 200%
	Fluid Resist.	Tensile strength	Min. 1000 psi
		Dielectric strength	Min. 400 Volts/mil
	Heat shock	250°C/4 hrs	No cracks, flowing, or dripping
	Low temperature flex	ASTM D746	No crack @-55°C
Secant Modulus	ASTM D882	Min. 25,000 psi	
Electrical	Dielectric strength	ASTM D2671	Min. 500 Volts/mil
	Volume resistivity	ASTM D876	Min. $1 \times 10^{15} \Omega \cdot \text{cm}$
Chemical	Copper corrosion	121°C/16hrs	No corrosion
	Fungus resistance	ASTM G21	No growth
	Water Absorption	ASTM D570	Max. 0.5%

Rev. May 2011




Dunbar Products, LLC
Your Stocking Partner for Quality Components

P.O Box 112218, Carrollton, Texas 75011-2218
Tel: (469) 568-0800
Fax: (469) 568-0808



DUNBAR – 3625WS

3:1 HIGH SHRINK RATIO, DUAL-WALL, SEMI-RIGID, POLYOLEFIN TUBING

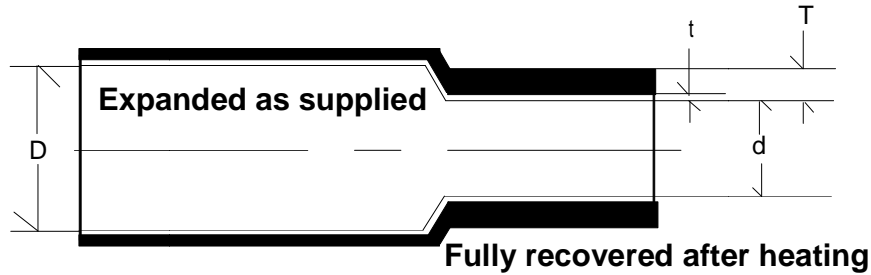

Product Dimensions

Minimum Shrink Temperature: 125°C

Size	Expanded		Recovered					
	Internal Diameter Minimum (D)		Internal Diameter Maximum (d)		Minimum Total Wall Thickness (Total Wall) (T)		Minimum Wall Thickness (Adhesive Wall) (t)	
Inch Size	In.	mm	In.	mm	In.	mm	In.	mm
1/8	0.125	3.2	0.023	0.58	0.038	0.97	0.020	0.50
3/16	0.187	4.8	0.060	1.52	0.043	1.09	0.025	0.63
1/4	0.250	6.4	0.080	2.03	0.047	1.19	0.027	0.68
3/8	0.375	9.5	0.135	3.43	0.050	1.27	0.030	0.76
1/2	0.500	12.7	0.195	4.95	0.055	1.40	0.035	0.89
3/4	0.750	19.1	0.313	7.95	0.065	1.65	0.040	1.02
1	1.000	25.4	0.400	10.2	0.075	1.91	0.040	1.02

Rev. May 2011



Dunbar Products, LLC
Your Stocking Partner for Quality Components

P.O. Box 112218, Carrollton, Texas 75011-2218
Tel: (469) 568-0800
Fax: (469) 568-0808