



# DUNBAR – 1675 Kynar

2:1 SHRINK RATIO, HIGH TEMPERATURE, CHEMICAL RESISTANT PVF<sub>2</sub> TUBING

## Applications

DUNBAR-1675 is semi-rigid, flame retardant, heat shrinkable polyvinylidene fluoride (PVF<sub>2</sub>) tube for applications requiring outstanding abrasion and cut-through resistance. It reliably protects wires, solder joints, terminals, connections, and components from most industrial fuels, solvents, and chemicals.

## Features

- ★ Shrink ratio: 50% or more in the radial direction, 10% or less in the axial direction
- ★ In stock for immediate shipment
- ★ Continuous operating temperature: -55°C (-67°F) to 175°C (347°F)
- ★ Flammability: UL VW-1, CSA OFT
- ★ Highly heat and abrasion resistant
- ★ High resistance to chemicals and oils

## Standards

- ★ SAE AS23053/8 (Formerly AMS-DTL-23053/8)  
Clear & Black stocked, All colors available.
- ★ Declared Dimensional Life (DDL) – 10 Years
- ★ UL 224: VW-1, 150°C, 600V (File Number: E319303)
- ★ RoHS & REACH Compliant

## Specification Values

Property		Test Method	Value	
Physical	Unaged	Tensile Strength	Min. 5,000 psi	
		Elongation	Min. 150%	
	Aged	Elongation	ASTM D638	Min. 50%
	Fluid Resist.	Tensile Strength	24°C/24 hrs	Min. 5,000 psi
		Dielectric Strength	6 Fluids	Min. 500 Volts/mil
	Concentricity		ASTM D2671	Min. 70%
	Crystalline Melt Point		ASTM D4951	Min. 150°C
	Heat Shock		300°C/4 hrs	No cracks, flowing, or dripping
	Low Temperature Flexibility		-55°C/4 hrs	No cracking
	Secant Modulus		ASTM D882	Min. 120,000 psi
Specific Gravity		ASTM D792	Max. 1.8	
Electrical	Dielectric Strength		ASTM D2671 Min. 800 Volts/mil (sizes to .5 in.) Min. 600 Volts/mil (sizes over .5 in.)	
	Volume Resistivity		ASTM D876 Min. 10 <sup>13</sup> Ω · cm	
Chemical	Copper Corrosion		175°C/16 hrs No corrosion	
	Fungus Resistance		ASTM G21 No growth	
	Water Absorption		ASTM D570 Max. 0.5%	
	Flammability		ASTM D2671 Pass	

Rev. April 2024



Dunbar Products, LLC  
Tubing and Identification Products




1302 Champion Circle, Carrollton, TX 75006  
Tel: (469) 568-0800  
Fax: (469) 568-0808



# DUNBAR – 1675 Kynar

2:1 SHRINK RATIO, HIGH TEMPERATURE, CHEMICAL RESISTANT PVF<sub>2</sub> TUBING

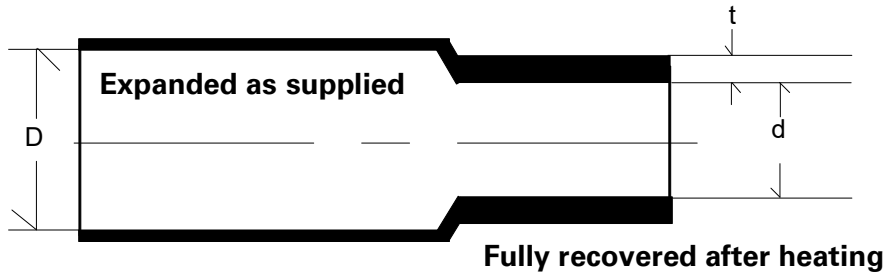

## Product Dimensions

Minimum Shrink Temperature: 175°C

Size	Expanded		Recovered				Standard Spool Length
	Internal Diameter (Minimum) (D)		Internal Diameter (Maximum) (d)		Total Wall Thickness (Minimum) (t)		
	In.	mm	In.	mm	In.	mm	ft
3/64"	0.046	1.2	0.023	0.6	0.008	0.2	500
1/16"	0.063	1.6	0.031	0.8	0.008	0.2	500
3/32"	0.093	2.4	0.046	1.2	0.008	0.2	500
1/8"	0.125	3.2	0.062	1.6	0.008	0.2	500
3/16"	0.187	4.7	0.093	2.4	0.008	0.2	250
1/4"	0.250	6.4	0.125	3.2	0.009	0.2	250
3/8"	0.375	9.5	0.187	4.7	0.009	0.2	200
1/2"	0.500	12.7	0.250	6.4	0.009	0.2	200
3/4"	0.750	19.1	0.375	9.5	0.014	0.3	100
1"	1.00	25.4	0.500	12.7	0.016	0.4	100

Rev. April 2024

Standard Colors: Clear & Black  
 Optional Color(s): Available by special order



Dunbar Products, LLC  
 Tubing and Identification Products



1302 Champion Circle, Carrollton, TX 75006  
 Tel: (469) 568-0800  
 Fax: (469) 568-0808