



DUNBAR – FK150

2:1 SHRINK RATIO, FLEXIBLE, HEAT SHRINKABLE POLYVINYLIDENE FLUORIDE (PVDF) TUBING


Applications

DUNBAR-FK150 is a flexible, thin wall, flame retardant, heat shrinkable polyvinylidene fluoride (PVDF) tube. It is designed for applications requiring outstanding abrasion and cut-through resistance. It reliably protects wires, solder joints, terminals, connections, and components from most industrial fuels, solvents, and chemicals.

Features

- ★ Shrink ratio: 50% or more in the radial direction, -10% or less in the axial direction
- ★ Continuous operating temperature: -55 °C (-67 °F) to 150 °C (302 °C)
- ★ Thin wall
- ★ High resistance to fuel, chemicals, and oils

Standards

- ★ SAE AS23053/18 Class 2 (Formerly AMS-DTL-23053/18 Class 2)
- ★ Declared Dimensional Life (DDL) – 10 Years
- ★  UL 224: VW-1, 600V, 150°C (File Number: E319303)
- ★ RoHS & REACH Compliant

Specification Values

Property		Test Method	Value	
Physical	Unaged	Tensile Strength	Min. 2500 psi	
		Elongation	Min. 300%	
	Aged	Elongation	225 °C/168 hrs	Min. 250%
	Fluid Resistance	Tensile Strength	24 °C/24 hrs	Min. 2000 psi
		Elongation	6 Fluids	Min. 250%
	Concentricity		ASTM D2671	Min. 70%
	Heat Shock		275 °C/4 hrs	No cracks, flowing, or dripping
	Low Temperature Flexibility		-55 °C/4 hrs	No cracking
	Specific Gravity		ASTM D792	Max. 2.00
Secant Modulus		ASTM D882	25,000 ~ 100,000 psi	
Electrical	Dielectric Strength		ASTM D2671	Min. 400 Volts/mil
	Volume Resistivity		ASTM D876	Min. 10 ¹¹ Ω · cm
Chemical	Copper Corrosion		160 °C/16 hrs	No corrosion
	Fungus Resistance		ASTM G21	No growth
	Water Absorption		ASTM D570	Max. 0.5%
	Flammability		ASTM D2671	Pass

Rev. April 2024



Dunbar Products, LLC
Tubing and Identification Products




1302 Champion Circle, Carrollton, TX 75006
Tel: (469) 568-0800
Fax: (469) 568-0808



DUNBAR – FK150

2:1 SHRINK RATIO, FLEXIBLE, HEAT SHRINKABLE POLYVINYLIDENE FLUORIDE (PVDF) TUBING

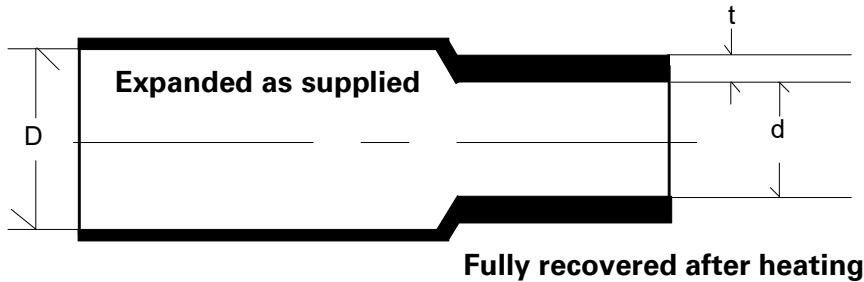

Product Dimensions

Minimum Shrink Temperature: 125 °C

Size	Expanded		Recovered				Standard Spool Length
	Internal Diameter (Minimum) (D)		Internal Diameter (Maximum) (d)		Wall Thickness (Minimum) (t)		
	in	mm	in	mm	in	mm	ft
3/64"	0.046	1.2	0.023	0.6	0.008	0.2	500
1/16"	0.063	1.6	0.031	0.8	0.008	0.2	500
3/32"	0.093	2.4	0.046	1.2	0.008	0.2	500
1/8"	0.125	3.2	0.062	1.6	0.008	0.2	500
3/16"	0.187	4.7	0.093	2.4	0.008	0.2	250
1/4"	0.250	6.4	0.125	3.2	0.009	0.2	250
3/8"	0.375	9.5	0.187	4.7	0.009	0.2	200
1/2"	0.500	12.7	0.250	6.4	0.009	0.2	200
3/4"	0.750	19.1	0.375	9.5	0.014	0.3	100
1"	1.000	25.4	0.500	12.7	0.016	0.4	100

Rev. April 2024

Standard Color: Clear & Black
 Optional Color(s): Available, please inquire



Dunbar Products, LLC
 Tubing and Identification Products



1302 Champion Circle, Carrollton, TX 75006
 Tel: (469) 568-0800
 Fax: (469) 568-0808